



CH-506TXWP & RXWP

HDMI & IR over Single CAT5e/CAT6



Operation Manual

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from Cypress Technology.

© Copyright 2012 by Cypress Technology.

All Rights Reserved.

Version 1.1 June 2012

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.





SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

REVISION HISTORY

VERSION NO.	DATE DD/MM/YY	SUMMARY OF CHANGE
RDV1	14/02/12	Preliminary Release



CONTENTS

1. Introduction	1
2. Applications	1
3. Package Contents	1
4. System Requirements	1
5. Features	2
6. Operation Controls and Functions	3
6.1 Transmitter.....	3
6.2 Receiver	4
7. D-Sub 9 Pin Definitions	5
8. Connection Diagram	6
9. Specifications	7
10. Acronyms	8





1. INTRODUCTION

The device that can make your home or office more efficient, this unit of HDMI over Single CAT5e/6 can transmit and receive uncompressed audio/video, control through the built-in RS-232 and IR ports and Power on Ethernet(POE) over 100M with all plate design. Hence, if you want to make your home or office more efficient, get the HDMI & IR over single CAT5e/CAT6 and prepare to be amazed.

2. APPLICATIONS

- Household entertainment sharing and control
- Lecture room display and control
- Showroom display and control
- Meeting room presentation and control
- Classroom display and control

3. PACKAGE CONTENTS

- HDMI & IR over Single CAT5e/CAT6 Transmitter x 1
- HDMI & IR over Single CAT5e/CAT6 Receiver x 1
- IR Blaster x 1
- IR Receiver x 1
- 3.5Ø to RS-232 female cable x 1 for transmitter
- 3.5Ø to RS-232 male cable x 1 for receiver
- 24V/1.25A DC Power Adaptor x 1
- Operation Manual

4. SYSTEM REQUIREMENTS

Input HDMI source equipment such as DVD/Blue-Ray player and output display with HDMI input jack.

5. FEATURES


- HDMI 1.4 with 3D, 4k x 2k support, HDCP & DVI Compliant
- Supports HDCP repeater and CEC bypass
- Simultaneously uncompressed data sending over a single 100M/328ft with CAT6 or CAT5e cable
- Uncompressed video 1080p, 60Hz, 36bits
- Audio support up to 7.1CH & Dolby TrueHD, DTS-HD
- 4Play™ convergence: HDMI, POE & Control (IR & RS232)
- Wall plate design and Installation Friendly

Note: This system was tested with CAT6/23AWG cable, so if using cables of another type, results may vary.

DRAFT


6. OPERATION CONTROLS AND FUNCTIONS

6.1 Transmitter

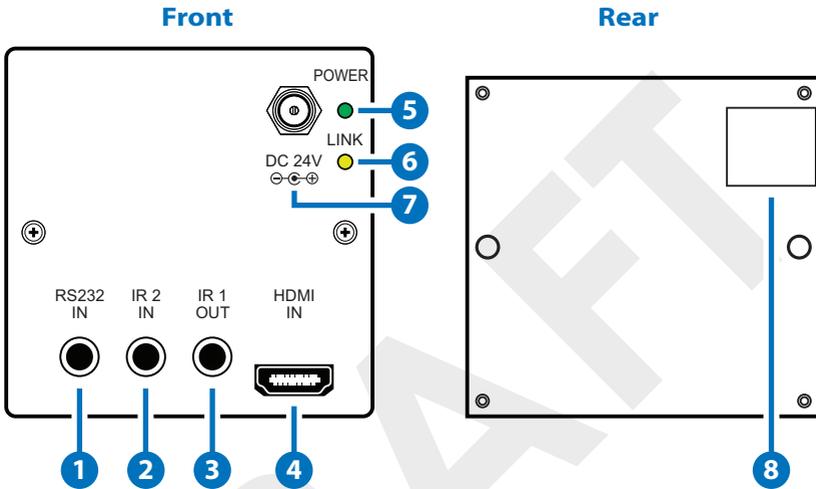

- 1 **RS-232 IN:** This slot is to connect with 3.5Ø phone jack RS-232 cable from PC/NB equipment for sending RS-232 commands.
- 2 **IR 2 IN:** This slot is to connect with the IR receiver cable included in the package for IR signal receiving.
- 3 **IR 1 OUT:** This slot is to connect with the IR blaster cable included in the package for IR signal transmitting.
- 4 **HDMI IN:** This slot is to connect with HDMI source equipment such as DVD/Blu-ray player.
- 5 **POWER LED:** This green LED will illuminate when the device is attached with power supply.
- 6 **LINK LED:** This yellow LED will illuminate when the both CAT5e/6 input and output signal is connected.
- 7 **DC 24V:** This slot is where you plug the 24V DC power supply into the unit and connect the adaptor to an AC outlet.
- 8 **CAT5e/6 Out:** Connect to the receiver unit with a single CAT5e/6 cable for transmission of all data signals.

6.2 Receiver

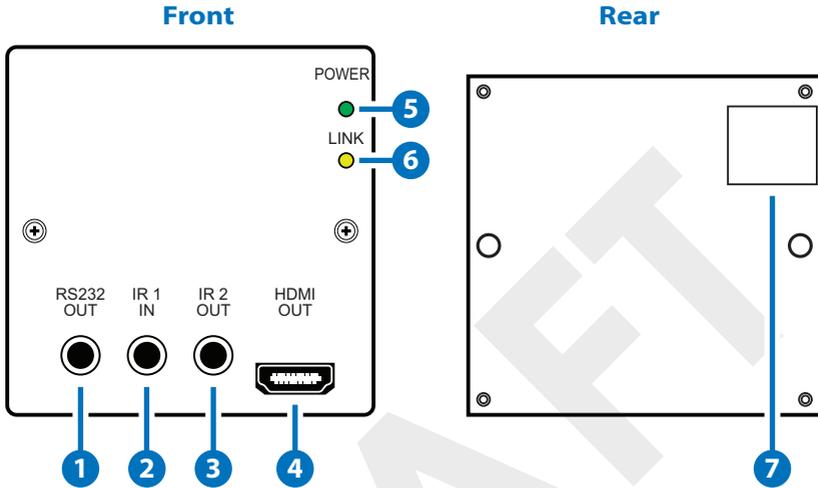


- 1 **RS-232 OUT:** This slot is to connect with 3.5Ø phone jack RS-232 cable from device equipment for receiving RS-232 commands.
- 2 **IR 1 IN:** This slot is to connect with the IR receiver cable included in the package for IR signal receiving.
- 3 **IR 2 OUT:** This slot is to connect with the IR blaster cable included in the package for IR signal transmitting.
- 4 **HDMI OUT:** This slot is to connect with HDMI TV/monitor for display HDMI input source signal.
- 5 **Power LED:** This green LED will illuminate when the device is connected to a power supply.
- 6 **LINK LED:** This yellow LED will illuminate when the both CAT5e/6 input and output signal is connected.
- 7 **CAT5e/6 In:** This slot is to be connected with a single CAT5e/6 cable from transmitter side for data transmitting.

7. D-SUB 9 PIN DEFINITIONS

Pin	Define TX/RX
1	N/C
2	TxD/RxD
3	RxD/TxD
4	N/C
5	GND
6	N/C
7	N/C
8	N/C
9	N/C

8. CONNECTION DIAGRAM

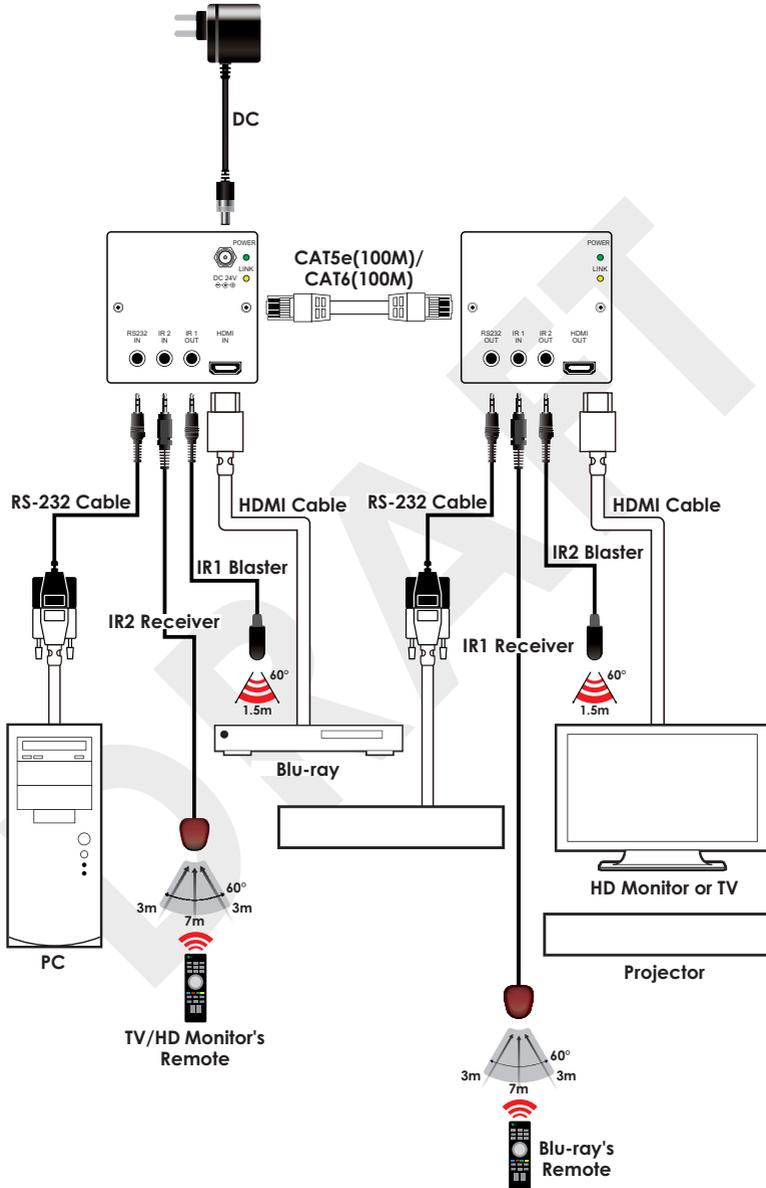



9. SPECIFICATIONS

Transmitter

Input 1×HDMI, 1×IR Extender, 1×RS-232

Output 1×CAT5e/6, 1×IR Blaster

Receiver

Input 1×CAT5e/6, 1×IR Extender

Output 1×HDMI, 1×RS-232, 1×IR Blaster

Power Supply 24V / 1.25A DC (US/EU standards, CE/FCC/UL certified)

ESD Protection Human-body Model:

±8kV (air-gap discharge)

±4kV (contact discharge)

IR Frequency 30~50 kHz

Dimensions (mm) 87(W) 97x (D) x 31 (H)/Tx

87(W) 97x (D) x 29(H)/Rx

Weight (g) 200

Chassis Material Aluminum

Silkscreen Color Black

Power Consumption TX: 3W ; RX: 6W

Operating Temperature 0 °C~40 °C/32 °F~104 °F

Storage Temperature -20 °C ~ 60 °C/-4 °F~140 °F

Relative Humidity 20~90 % RH (non-condensing)

10. ACRONYMS

ACRONYM	COMPLETE TERM
CAT5e	Category 5 Cable
CAT6	Category 6 Cable
CEC	Consumer Electronics Control
DVI	Digital Visual Interface
HDCP	High-bandwidth Digital Content Protection
HDMI	High Definition Multimedia Interface
IR	Infrared

DRAFT

DRAFT



CYPRESS TECHNOLOGY CO., LTD
Home page: <http://www.cypress.com.tw>