



DVI and KVM Extender over IP



Extend and Distribute DVI, USB, RS-232, IR, and 2-way audio over a Local Area Network using any combination of HDMI, DVI, and VGA Senders and Receivers

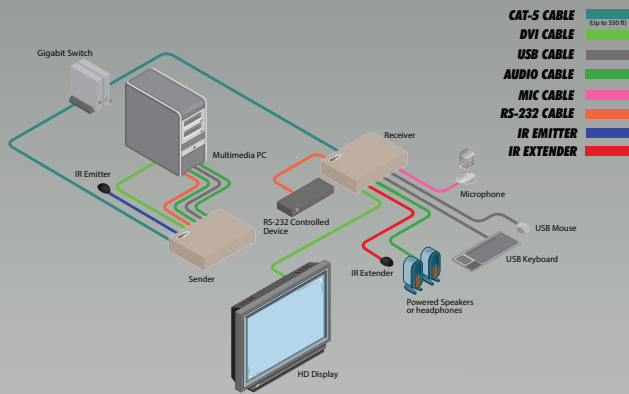
The DVI KVM over IP extends DVI, USB, 2-way analog audio, RS-232, and IR, over a Gigabit Local Area Network. Resolutions up to 1080p Full HD and 1920 x 1200 (WUXGA) are supported. The Gefen Video over IP products can be used as a "Virtual Matrix". When using HDCP-encrypted content, only HDMI Senders and Receiver units can accept and display the content. HDMI digital audio is also supported when using HDMI sources and displays with HDMI-to-DVI adapters. The Sender and Receiver units can be automatically or manually configured to unique IP addresses to allow the connection of multiple Senders and Receivers to the same network. Multiple Receiver units can simultaneously connect to any Sender unit within the network to create a virtual crosspoint matrix. Up to 256 Senders and 256 Receivers can be connected to create a theoretical limit of just over 65,000 units, depending on the network bandwidth and number of ports of the network switch. Each Receiver unit has a built-in Ethernet switch and two additional RJ-45 Ethernet ports to allow for the connection of computers and other IP-enabled devices. USB 2.0 data rates up to 480 Mbps are supported in addition to backward-compatibility with USB 1.1. Each Receiver unit provides two USB ports with up to 500mA current draw per connector, providing access to keyboard, mouse, and other compatible devices. Bi-directional analog audio capability allows audio to be transported between the Sender and the Receiver units. The built-in mic pre-amp on the Receiver unit ensures compatibility with a variety of microphones. IR commands from the Receiver side can be extended to sources connected to any of the Senders units. RS-232 serial control can also be extended between each Sender and Receiver unit. The built-in Web server interface makes set-up and configuration simple and intuitive. The DVI KVM over IP is perfect for large scale remote workstation access and digital signage applications.

How It Works

If you are connecting multiple Sender units, use the built-in Web interface to assign a unique channel and/or switch between Sender units. Use the included DVI cable to connect a computer or other DVI source to the Sender's DVI input. Use the included USB and RS-232 cables to connect the computer's USB and RS-232 interfaces to the Sender unit. Connect audio Line In and audio Line Out as needed to the Sender. Connect a Gefen IR emitter to the Sender and attach it to the IR sensor lens of the source. Connect the DVI output of the Receiver to your Hi-Def display. Connect your USB devices, RS-232 devices, microphone, and headphones or amplified speakers to the Receiver unit. If the Receiver is not installed in the line-of-sight of the end-user, and IR commands will need to be sent to the source, connect a Gefen IR extender to the Receiver. Connect the Sender and Receiver units to each other directly or through a Gigabit Ethernet switch, using CAT-5e or better cables. Each cable run can be up to 330 feet (100 meters) in length. If the Sender is connected to your LAN, you can use the two additional RJ-45 ports on the Receiver to connect computers and other IP enabled devices. Connect the included 5V power supplies to the Sender and Receiver units and to available electrical outlets. Power-on all associated equipment. Use the Mode button on the Sender to optimize the picture for sharper still images or smoother video motion.

Note: A Gigabit switch is required. The Gigabit switch must support 8k jumbo frame packets in order for multicast mode to operate. If your LAN is not dedicated to Gefen KVM-LAN products exclusively, then a managed switch is highly recommended.

Wiring Diagram


1080P
 PROGRESSIVE

Features *

- Extends DVI, USB, RS-232, bi-directional stereo analog audio, and IR over IP, using a Gigabit Local Area Network
- Any combination of HDMI, DVI, and VGA Senders and Receivers can be used
- Supports resolutions up to 1080p Full HD and 1920 x 1200 (WUXGA)
- Built-in Web interface for each Sender and Receiver unit provides intuitive control of all features
- Supports up to 256 Sender units and 256 Receiver units in a single system
- USB 2.0 data rates up to 480 Mbps and backward-compatibility with USB 1.1
- Three-port Gigabit Ethernet switch built into the Receiver unit
- Switch between all available Sender units using the built-in Web interface
- Mode button on Sender for sharpness or motion optimization of image
- Field-upgradable firmware via web server interface
- Locking power supply connectors
- 1U tall, half-rack width enclosures are rack-mountable using EXT-RACK-1U
- Surface mounting brackets included

Specifications *

• Maximum Pixel Clock:	165 MHz
• Video Input Connector (Sender):	(1) DVI 29-pin, female, digital only
• Video Output Connector (Receiver):	(1) DVI 29-pin, female, digital only
• Line Input (Sender):	(1) 3.5mm mini-stereo jack
• Line Output (Sender):	(1) 3.5mm mini-stereo jack
• Mic Input (Receiver):	(1) 3.5mm mini-stereo jack
• Line Output (Receiver):	(1) 3.5mm mini-stereo jack
• USB Host Interface (Sender):	(1) USB Type B, female
• USB Device Connectors (Receiver):	(2) USB Type A, female
• RS-232 Connector (Sender):	(1) DB-9, female
• RS-232 Connector (Receiver):	(1) DB-9, male
• IR Emitter (Sender)	(1) 3.5mm mini-mono jack
• IR Extender (Receiver)	(1) 3.5mm mini-stereo jack
• Ethernet connector (Sender):	(1) RJ-45, shielded
• Ethernet connectors (Receiver):	(3) RJ-45, shielded
• Mode button (Sender):	(1) tact-type
• Switch button (Receiver)	(1) tact-type
• Reset button (Sender/Receiver):	(1) tact-type, recessed
• Link Indicator (Sender/Receiver):	(1) LED, green
• Power Indicator (Sender/Receiver):	(1) LED, blue
• Power Supply (Sender/Receiver):	5V DC, locking
• Power Consumption (Sender/Receiver):	10W (max.)
• Dimensions (Sender/Receiver) (W x H x D):	8.4" x 1.7" x 4.5" (213mm x 43mm x 113mm)
• Shipping Weight:	8.2 lbs. (3.7 kg)

* Features and specifications are subject to change without notice. All trademarks are properties of their respective owners.