


FCS 3051 Main Control Unit (W/O Voting, W/LCD)

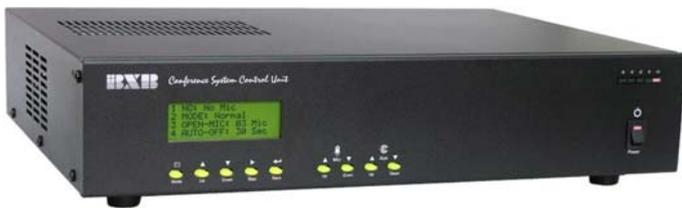

- Has three (3) chain outputs for daisy connection, each link can be linked up to 25 units
- Can control up to 10 chairman units & 500 delegate units by extension power supply
- Has 4x20 digit LCD monitor display, the configurations can be set up and displayed from it
- **Multi-Conferencing Operating Modes:**
 - **NORMAL/OVERRIDE/CHAIRMAN**
 - **FIFO:** 1. Delegates have the ability to open their own mics 2. When the maximum open mics is reached, mics will go into request-to-speak que
 - **OPEN-MIC:** Numbers of Microphone push to talk simultaneously is up to 1-30
 - **VOICE (Auto-MIC Shut-Off): 10-99** seconds without speaking, microphone will be automatically shut-off
- **System Auto-Test** functions when power on. When failed connection, the Red ring of light is flashing
- Main control unit and Chairman Unit controls all delegate mice activation and has the alarm sound when delegate-off
- Provides **RS-232** interface is supported with Creston or AMX wired or wireless touch screens
- Built-in Video Control Management Interface
 - Three (3) Phased Images Auto-Tracing
Functionality: **BUTTON/VOICE/PRESET**
- Has LED Volume Indicators
- Built-in sound-emission circuit to prevent echo and noise
- Synchronized with BXB Authorized Conference Management Software
- **Digital Volume Adjustment**

TECHNICAL SPECIFICATIONS

Frequency response	100HZ~16KHZ
LINE IN :	-4dB~+6dB \geq 10K Ω (Balanced)
LINE OUT :	-4dB~+12dB \geq 200 Ω (Balanced)
Sensitivity :	-60dB
T.H.D. :	\leq 0.5%
S/N Ratio :	\geq 90dB
Conference microphone connection :	D type 9P express port x 3 sets
MIC (XLR) Input	1 set x 600 Ω /6mV/-22dB (Digital Control)
Line (XLR) Input	1 set x 20K Ω /300mV/-10dB(Digital Control)
Volume Indicators	5 LEDs
Power	AC110/220 , 50/60Hz , Power LED light
Height x Width x Depth	100 x 430 x 230 (mm)
Weight	8 (kg)

*The appearance and specifications of all item are subject to change without notice