




MILAN S.r.l.
Head Office - Export Dept.:
 20090 Cusago (MI) - Italy
 Viale Europa, 74
 Tel. +39 02 90394556 - 4158
 Fax. +39 02 90394551
 www.taskercables.com

**Ufficio Commerciale
 e Centro Distribuzione**
 20090 Cusago (MI) - Italia
 Viale Europa, 72 Strada F12
 Tel. +39 02 90390037 - 59
 Fax +39 02 90390049
 www.tasker.it

New tasker® T 39 1x75 Ω

Triple Shielded Coaxial Video Cable 75 Ω

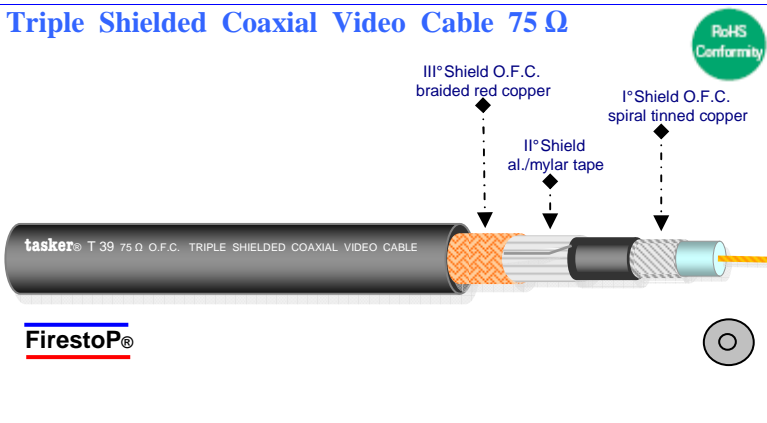

Applications:

Special coaxial cable with triple shield for special video installations on long distances in big spaces as for example airports, megastores, public buildings, hospitals etc.

Characteristics:

Conductor: Stranded in O.F.C. red copper
 Insulation: PEE
 I° Shield: Spiral covering 100%
 O.F.C. tinned copper
 Inner Sheath: Flame Retardant PVC CEI 20-22/II°
 Sheath colour: Black
 II° Shield: Al./Mylar Tape covering 100%
 III° Shield: Braided covering 90%
 O.F.C. red copper
 Total Sheath: Flame Retardant PVC CEI 20-22/II°
 Sheath colour: Black

tasker® Code	Cond. number	Cond. number Nominal section	Cond. Format. mm.	External Core Ø mm.	External Inner Sheath diameter mm.	External Cable diameter mm.	Reel or Spool			Conductor Resistance Ω/Km ± 5%	Capacity Core/core pF/mt	Capacity Core/shield pF/mt
							mt.	Type	Kg.			
T 39	1	1 x 75 Ω (0,08 mm²)	10x0,10	1,6	2,9	4,7	100	B		210		67
								Velocity of propagation %	Impedance Ω ± 3%	Max rated Voltage V	Operative Temperature °C.	
								66	75	49	- 15 / + 70	
Attenuation db/100 mt												
							50 MHz	100 MHz	200 MHz	400 MHz		
							12,54	19,57	26,84	41,10		

**MILAN S.r.l. - tasker®
 TECHNICAL DEPARTMENT**