
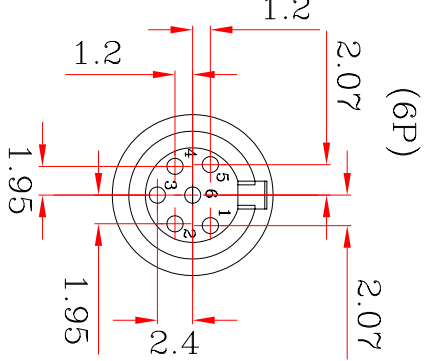
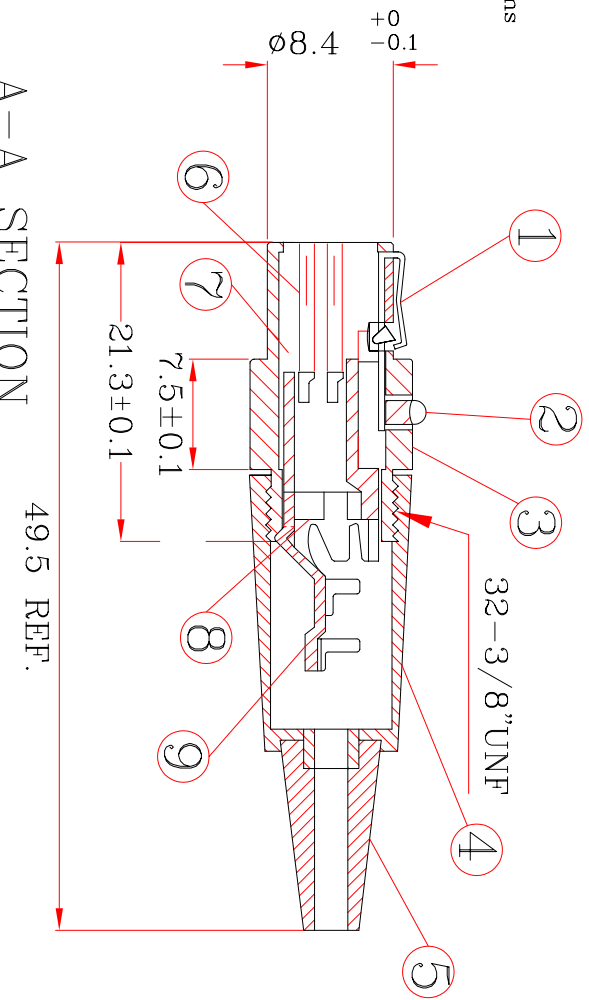
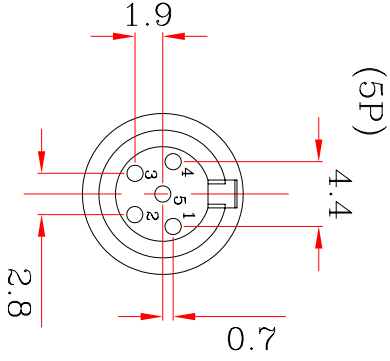
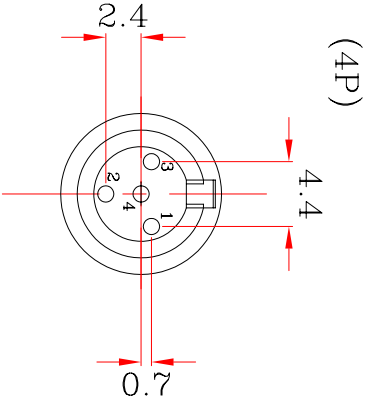
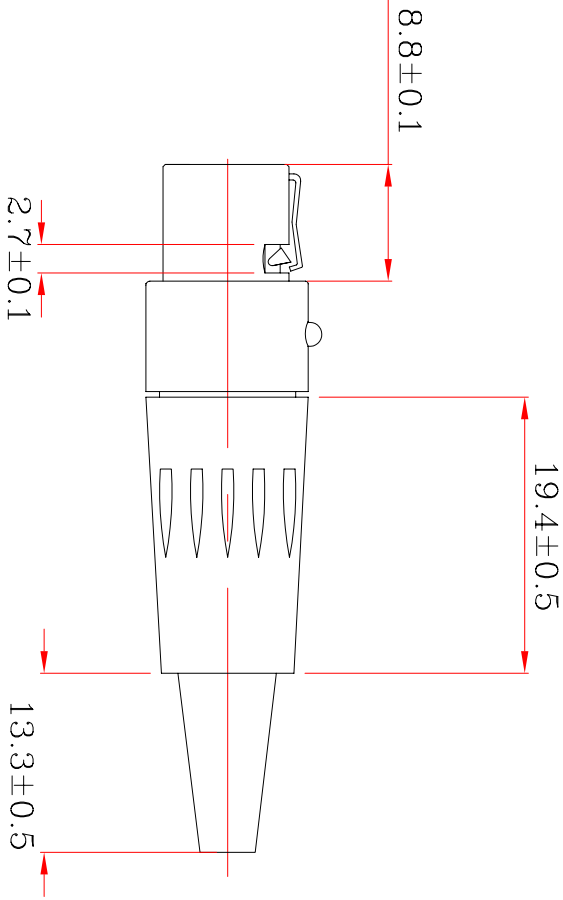


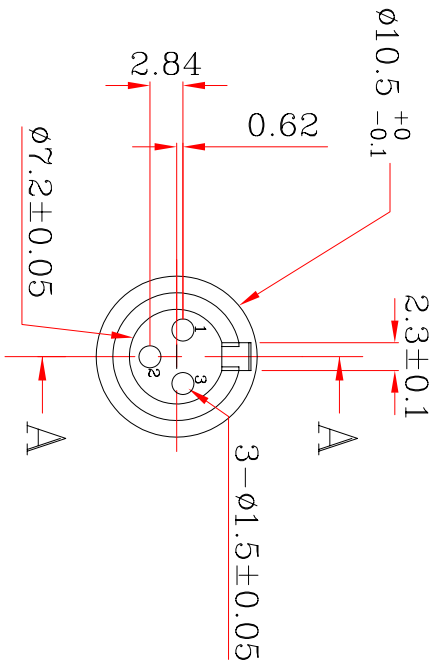

Current Rating(3p,4p) :5A,125VAC,base on 30 ohm maximum
Current Rating(5p) :4A,125VAC,base on 30 ohm maximum
Current Rating(6p) :5A,125VAC,base on 30 ohm maximum
Insulation Resistance:510000M(omega) minimum@500VDC
Dielectric Strength(3p,4p,5p):1000V rms
Dielectric Strength(6p):250V rms

MATERIAL

- 1 SUS(AISI-301)
- 2 ABS-BLACK
- 3 BRASS-NICKEL PLATED
- 4 ABS-BLACK
- 5 PVC MOLDING-BLACK
- 6 BRASS-GOLD PLATED
- 7 PPS-BLACK
- 8 PPS-BLACK
- 9 BRASS-NICKEL PLATED

發行單位:				尺寸	公差	mm
接收單位	張數	接收單位	張數	接收單位	張數	接收單位
廠務	商	管		差	±	
營業	廠	商		120	315	0.2
營業				315	1000	0.3

核准	繪圖	審核	日期	13/04/01
核	圖	圖	PROJ	第三角法
核	圖	圖	SCALE	1:1
核	圖	圖	DATE	13/04/01

MODEL		MINI CONNECTER 3P FEMALE	
TITLE		MINI CONNECTER 3P FEMALE	