




Public Address System
Wall Mount Speaker System WL356



OWNER'S MANUAL


Thanks for purchasing PA speaker system of **ABK** series. All of **ABK** series products have been tested strictly before shipping. **ABK** series PA speaker system is widely used in hotel, trade building, supermarket, school, entertainment, etc. It's the most ideal choice of you! In order to facilitate installing, modulating and running please read this manual carefully before setup.

FEATURES:

- 70/100V, 1.5-10W with multiple terminals, suited for different field;
- Max. Sound Pressure Level $97 \pm 2\text{dB}$, Effective Freq. Range 200Hz-16kHz;
- Weight 0.8kg, equipped with hanging holes for mounting convenient;
- Made of high quality engineering plastic, long-term durability, never out of shape and fade;
- Driver surround excellent damping, provided with high sensitivity ($91 \pm 2\text{dB}$), long life, sound clear and sonorousness.


FREQ. RESPONSE

(dB SPL, 1W, 1m)

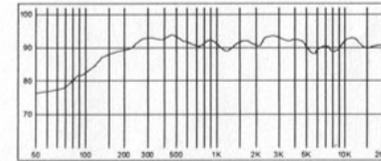


DISTORTION


(THD < 1.5% 1W, 1m, 200Hz-10kHz)

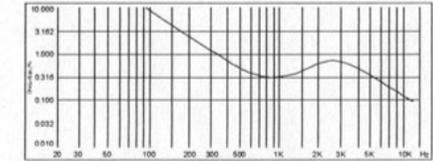

HANGING HOLE



NAIL FOR MOUNTING

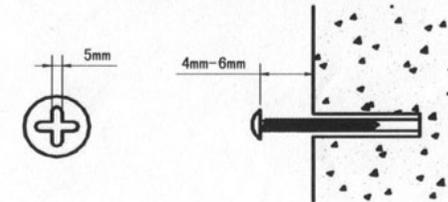

INSTALLATION

1. Fit two $\text{O}4\text{mm}$ nail on wall where it is needed to install a speaker system as shown above.
2. Connect audio broadcasting wire to the terminals according to the table below.

Power Terminals	Line Voltage	
	70V	100V
P1-P4	1.5W	3 W
P1-P3	3 W	6 W
P1-P2	5 W	10W (Notice)

Notice: While broadcasting wire is quite long and with high impedance only.

3. Position the speaker, then adjust the direction of it and examine whether it is steady.

Guangzhou DSPPA Audio Co., Ltd.