

iLux® Integrated Lighting System - International Version

- > Wall mount integrated lighting and shade control
- > 6 channels of dimming or switching
- > 6 groups of shade and drape control
- > Linkable for up to 54 lighting channels and 54 shade groups
- > Up to 16 user-settable scenes
- > 7 configurable “rocker” buttons with customizable label strip
- > Large ON and OFF buttons
- > Flip-up front cover reveals setup controls and programming port
- > 6 bargraphs show lighting levels and shade positions
- > Easy setup from front panel or iLux Designer software
- > Supports multipoint control using up to 16 keypads
- > Optional IR remote
- > Master air-gap relay
- > Integrates with 2-Series Control Systems via Cresnet
- > Energy saving ASHRAE 90.1/LEED compliant
- > Available in almond, black, or white

The iLux CLSI-C6 is a complete, integrated lighting system designed for wall mount installation in boardrooms, auditoriums, home theaters, or anywhere versatile and cost-effective control of lighting and shades is required. Crestron's reputation for innovation and reliability, combined with high-quality integrated dimming, native shade control, configurable rocker buttons, extensive integration ability and many other advanced features make iLux the ideal choice for all types of room lighting and shade control applications.

6 Channel Dimming

The CLSI-C6 features six channels of dimming for LED^[1], incandescent, magnetic low-voltage, neon/cold cathode, and 2-wire dimmable fluorescent loads. On/off switching of many non-dimmable lighting loads is also possible. Each channel will handle up to 800 watts individually, with a total rating of up to 2400 watts for the complete unit. Larger loads and additional load types can also be supported using Crestron CLS-EXP Series expansion modules.

6 Group Shade Control

Using Crestron's networked Shade and Drape Controllers, the CLSI-C6 enables versatile control of a roomful of motorized window treatments, screens and lifts in up to 6 shade groups.

Versatile Front Panel Controls

The deceptively clean front panel actually affords an extensive amount of control and customization to suit each unique room application. Large ON and OFF buttons provide instant access to the “On” and “All Off” scenes, while the six main buttons can be set up to recall additional scene presets, adjust shades, or perform a host of other functions. The buttons’ “rocker” action enables intuitive, tactile control for adjusting lighting levels and shade

positions. An additional “Up/Down” button is configurable for a variety of functions, including use as a master lighting or shade control, or as a “shift” button to expand the capabilities of the six main buttons.



With each new scene selection, window shades reposition and lights fade elegantly to their new settings. The selected scene is indicated by a white LED beside each button, and the customizable label strip allows each button to be clearly labeled using Crestron Engraver software or standard 3/8” tape labels. Dimming levels and shade positions are displayed graphically on 6 green LED bargraphs accessible behind the flip-up front cover. Additional controls and a numeric display hidden beneath the cover enable setup without requiring a PC. Enhanced customization is provided via the PC programming port using iLux Designer software.

Multipoint Keypad Control

Up to 16 Crestron keypads may be connected to a single CLSI-C6, providing versatile multipoint control for rooms with multiple entrances or work areas.

Multi-Unit Expansion

One CLSI-C6 master will support up to 8 additional CLSI-C6 or [CLSI-C6M](#) units, enabling systems of up to 54 lighting zones and 54 shade groups. Commands for typical functions like scene recall, scene off, master dimming, and occupancy status are shared between the CLSI-C6(M) units. Each individual unit can still support a complete assortment of local devices including keypads and shade controllers.

Control System Integration

The CLSI-C6 features two separate Cresnet® control networks, one for local devices and one for connection to a 2-Series control system. Connecting the CLSI-C6 to a control system allows its functions to be controlled from touchpanels, RF wireless remotes, and even computers. The control system interface also enables extensive flexibility for integration with other systems such as security, HVAC and energy management, plus remote monitoring via SNMP and Crestron [RoomView®](#) applications.

For a solution using Crestron's infiNET wireless technology instead of Cresnet, see the [CLSI-C6RF](#).

CLSI-C6 iLux® Integrated Lighting System - International Version

SPECIFICATIONS

Load Ratings

Dimmer Channels: 6

Maximum Per Channel: 800 Watts/VA (3.5 Amps @ 230 Volts AC)

Minimum Per Channel: 25 Watts/VA (0.108 Amps @ 230 Volts AC)

Module Total: 2200 Watts/VA (10 Amps @ 220 Volts AC);

2300 Watts/VA (10 Amps @ 230 Volts AC);

2400 Watts/VA (10 Amps @ 240 Volts AC)

Load Types: LED^[1], Incandescent, Magnetic Low-voltage, Neon/Cold Cathode, 2-Wire Dimmable Fluorescent, & Non-Dim Lighting (also: Electronic Low-voltage, 3 and 4-Wire Fluorescent, High-Inrush Switching, & 277V via CLS-EXP Series expansion modules)

Power Requirements

220 to 240 Volts AC, 50/60Hz line power

Connections

LOCAL DEVICES: (1) 4-pin 5mm detachable terminal block; Cresnet Master port for local devices including: C2N-DB and CNX-B Series keypads, 16 maximum; C2N-SSC-2 and C2N-SDC-DC shade controllers; 16 maximum; Additional CLSI-C6 or CLSI-C6M units, 8 maximum; Additional CNPWSI-75 or other Cresnet power supply required beyond 4 devices; C2N-SDC-DC always requires an additional power supply

CONTROL SYSTEM: (1) 4-pin 5mm detachable terminal block; Cresnet Slave port for connection to a 2-Series control system

HOT: (1) Captive screw terminal^[2], line power input

LOAD1 – LOAD6: (6) Captive screw terminals^[2], dimmer channel outputs 1 – 6

NEUTRAL: (1) Captive screw terminal^[2]

GROUND: (1) Captive screw terminal^[2]

PC (front): (1) 3.5mm TRS mini-phone jack, RS-232 Programming port

Controls

Buttons 1 – 6: (6) 3-position rocker pushbuttons; configurable to recall (or toggle recall/off) individual scenes, control shades, or for master lighting or shade control; “scene mastering” option enables manual dimming utilizing rocker button action; also used to adjust lighting levels when in “Lighting” mode and shade positions when in “Shades” mode; additional functionality configurable via software

Up/Down Button: (1) 3-position rocker pushbutton; configurable for master lighting or shade control, or as a “shift” for Buttons 1-6; additional functionality configurable via software

ON: (1) pushbutton, recalls “On” scene

OFF: (1) pushbutton, turns all lights off

LIGHTS, SHADES: (2) Pushbuttons, select “Lights” or “Shades” modes

SAVE, CANCEL, ^, v: (4) Pushbuttons, navigate and execute setup functions

Reset: Recessed miniature pushbutton for hardware reset

Dimming Ramp Rate: 5 seconds (default), software adjustable 1 to 10 seconds

Scene Fade Time: 2 seconds (default), software adjustable 0 seconds to 99 minutes

LED Indicators

Scenes: (6-white) Correspond with each “Scene” Button

High/Low: (2-white) Indicate “Shift” status

ON: (1-white) Indicates “On” Scene is selected

LIGHTS, SHADES: (2-green) Indicates “Lights” or “Shades” mode is active

SAVE, CANCEL: (2-green) Correspond with “Save” and “Cancel” Buttons

MIN, SEC: (2-green) Indicates display of “Minutes” or “Seconds”

1 – 6: (6-green) 7-Segment bargraphs, indicate lighting levels and shade positions

Numeric Display: (2-green) 8-Segment digits, indicates modes and setup values

IR Receiver

Reception Frequency: 36 kHz

Requires CLS-IRHT8 IR remote, sold separately

Environmental

Temperature: 32° to 104°F (0° to 40°C)

Humidity: 10% to 90% RH (non-condensing)

Enclosure

Mounts in a 4-gang electrical box, 3-1/2” deep minimum

Dimensions

Height: 4.48 in (11.38 cm)

Width: 8.89 in (22.58 cm)

Depth: 2.47 in (6.25 cm)

Weight

1.43 lb (0.65 kg)

CLSI-C6 iLux® Integrated Lighting System - International Version

MODELS & ACCESSORIES

Available Models

CLSI-C6A: iLux Integrated Lighting System - International Version, 230V, Almond

CLSI-C6B: iLux Integrated Lighting System - International Version, 230V, Black

CLSI-C6W: iLux Integrated Lighting System - International Version, 230V, White

Available Accessories

C2N-CBD-E: Cameo® Express Keypad, Standard Mount

C2N-CBD-P: Cameo® Keypad, Standard Mount

C2N-CBF-P: Cameo® Keypad, Flush Mount

CLS-EXP-DIM: iLux® Dimmer Expansion Module

CLS-EXP-DIMFDB: iLux® 3-Wire Fluorescent Dimmer Expansion Module

CLS-EXP-DIMFLV: iLux™ 0-10V Fluorescent Dimmer Expansion Module

CLS-EXP-DIMU: iLux™ Universal Dimmer Expansion Module

C2N-DB6: Decorator Keypad, 6-Buttons,

C2N-DB8: Decorator Keypad, 8-Buttons

C2N-DB12: Decorator Keypad, 12-Buttons

C2N-SDC: Shade and Drape Controller, 120V AC

C2N-SDC-DC: Shade and Drape Controller, 24V DC

C2N-SSC-2: Somfy® Shade Controller

CLS-IRHT8: iLux® IR Handheld Remote

CNPWS-75: Cresnet® Power Supply, 75 Watts

CNX-B2: Designer Keypad, 2-Buttons

CNX-B4: Designer Keypad, 4-Buttons

CNX-B6: Designer Keypad, 6-Buttons

CNX-B8: Designer Keypad, 8-Buttons

CNX-B12: Designer Keypad, 12-Buttons

CRESNET-HP-NP-TL-SP1000: Cresnet® “High-Power” Control Cable, non-plenum, teal, 1000 ft spool

CRESNET-HP-NP-TL-SP500: Cresnet® “High-Power” Control Cable, non-plenum, teal, 500 ft spool

CRESNET-NP-BK-B500: Cresnet® Control Cable, non-plenum, black, 500 ft box

CRESNET-NP-OR-B500: Cresnet® Control Cable, non-plenum, orange, 500 ft box

CRESNET-NP-TL-B250: Cresnet® Control Cable, non-plenum, teal, 250 ft box

CRESNET-NP-TL-B500: Cresnet® Control Cable, non-plenum, teal, 500 ft box

CRESNET-NP-TL-SP1000: Cresnet® Control Cable, non-plenum, teal, 1000 ft spool

CRESNET-NP-TL-SP500: Cresnet® Control Cable, non-plenum, teal, 500 ft spool

CRESNET-NP-YL-B500: Cresnet® Control Cable, non-plenum, yellow, 500 ft box

CRESNET-P-BK-SP500: Cresnet® Control Cable, plenum, black, 500 ft spool

CRESNET-P-OR-SP500: Cresnet® Control Cable, plenum, orange, 500 ft spool

CRESNET-P-TL-SP1000: Cresnet® Control Cable, plenum, teal, 1000 ft spool

CRESNET-P-TL-SP500: Cresnet® Control Cable, plenum, teal, 500 ft spool

CRESNET-P-YL-SP500: Cresnet® Control Cable, plenum, yellow, 500 ft spool

Notes:

1. For a list of compatible ballasts, visit www.crestron.com/lightingcompatibility (PDF)
2. Captive screw terminals accept up to two 22 to 12 AWG (0.34 to 4.0 mm²) wires per terminal.

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/salesreps or by calling 800-237-2041.


Specifications subject to change without notice. Crestron is not responsible for errors in typography or photography.

Crestron, the Crestron logo, iLux, Cresnet and Roomview are trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and other countries. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. ©2012 Crestron Electronics, Inc.


CLSI-C6 iLux® Integrated Lighting System - International Version

CAD DRAWINGS

Top

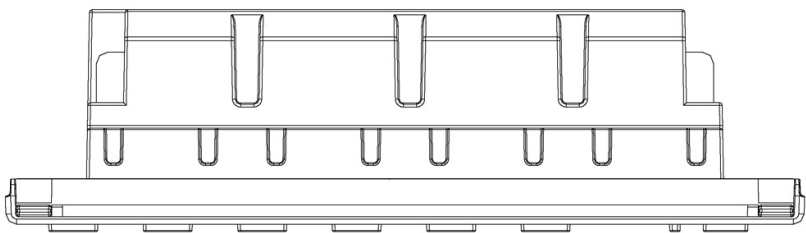

Front

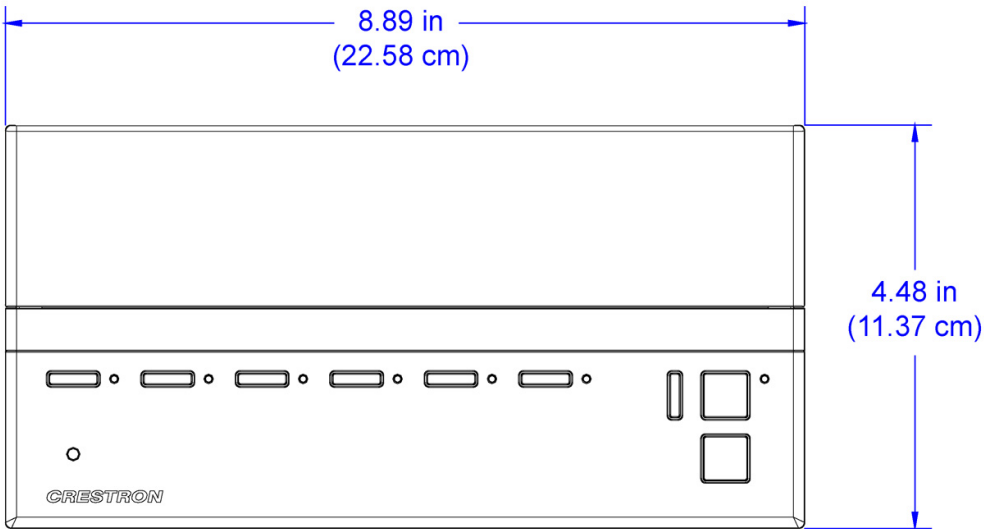

Side

