



# LINO10

Column speaker 10 x 2"

## Highlights:

---

- 10 x 2" high-quality broadband speakers

The LINO series are column speaker series designed for a wide variation of general purpose applications in acoustic difficult environments, ranging from speech and announcement applications to background music systems. Typical applications are houses of worship, auditoria, presentation rooms, public transportation hubs, ... and many more. They are solidly constructed using solid aluminum materials and finished through a rigid finely perforated front grill. Mounting is done through an L-shaped bracket on top and bottom, offering optimal flexibility for fixation and directional placement. Connections are made through terminal block connections.

The LINO10 column speaker consists of 10 x 2" low/mid frequency drives with an 1" central positioned tweeter for the high frequencies. It reaches a power handling of 40 Watt, while a multi-tapping line transformer allows it to be connected in 70V/100V public address systems with power taps for 40W, 20W and 10W

## Applications:

---

- Education
- Public facilities
- Corporate spaces
- Houses of worship



## Voltage:

---



## System specifications:

---


RMS Power		40 W
Max. Power		80 W
Impedance		20 $\Omega$
Sensitivity (1W/1m)		88 dB
Sound Pressure (Max. W/1m)		107.2 dB
Frequency	Range (-10 dB)	100 Hz - 20 kHz
	Response ( $\pm$ 3 dB)	150 Hz - 15 kHz
Line Transformer Tappings	1	125 $\Omega$ - 100 V / Not used - 70 V / 40 W
	2	250 $\Omega$ - 100 V / 40 W - 70 V / 20 W
	3	500 $\Omega$ - 100 V / 20 W - 70 V / 10 W
	4	1000 $\Omega$ - 100 V / 10 W - 70 V / 5 W
Drivers		10 x 2"
Connectors		6-pin Euro Terminal Block
Temperature	Operating	-20 - 50 $^{\circ}$ C

## Product Features:


---

Colours	Black & White
Construction	Aluminum
Front finish	Steel grill
Dimensions	72 x 807 x 101 mm (W x H x D)


Horizontal Polars:

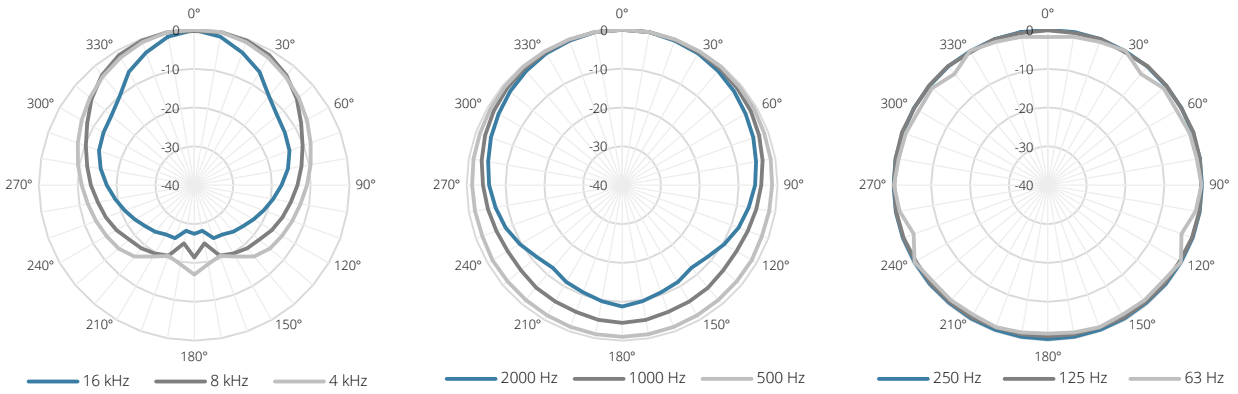


Vertical Polars:

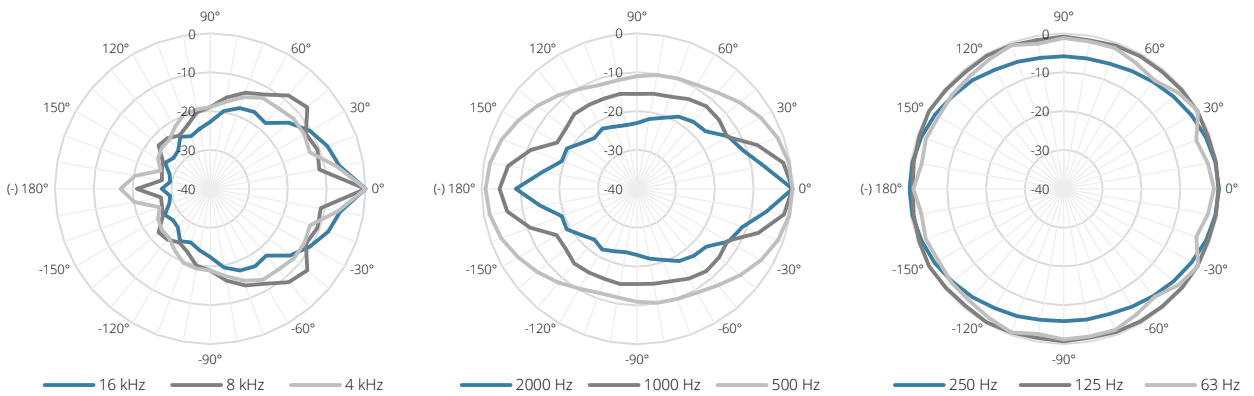


Sensitivity:


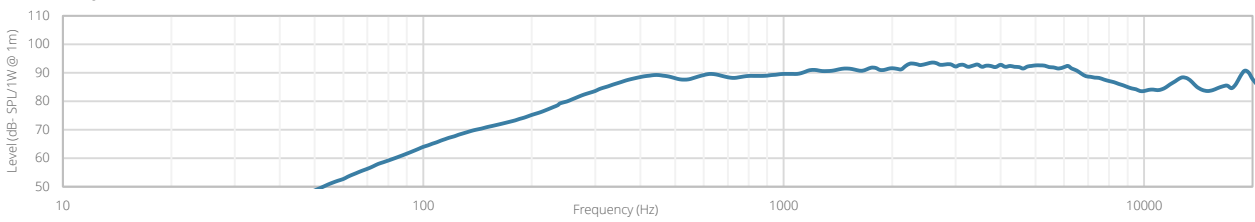


Beamwidth (-3dB):

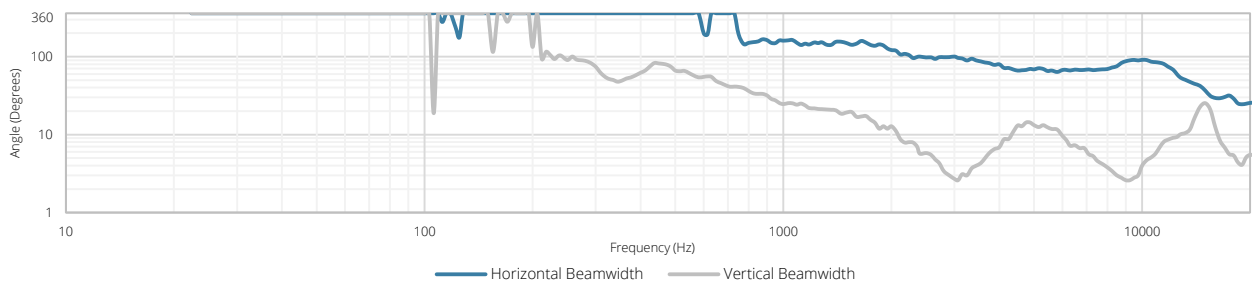

Directivity index:

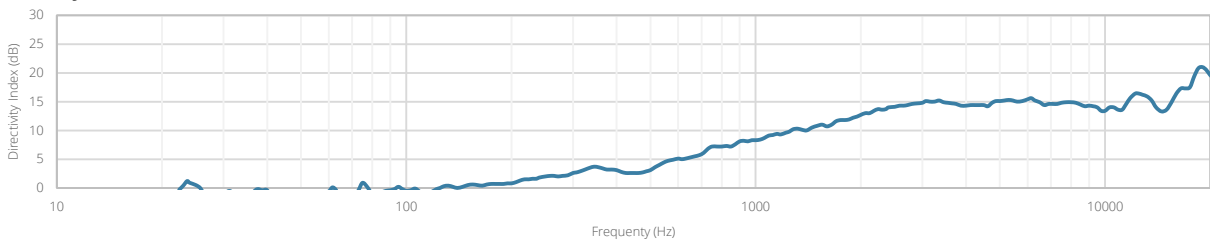

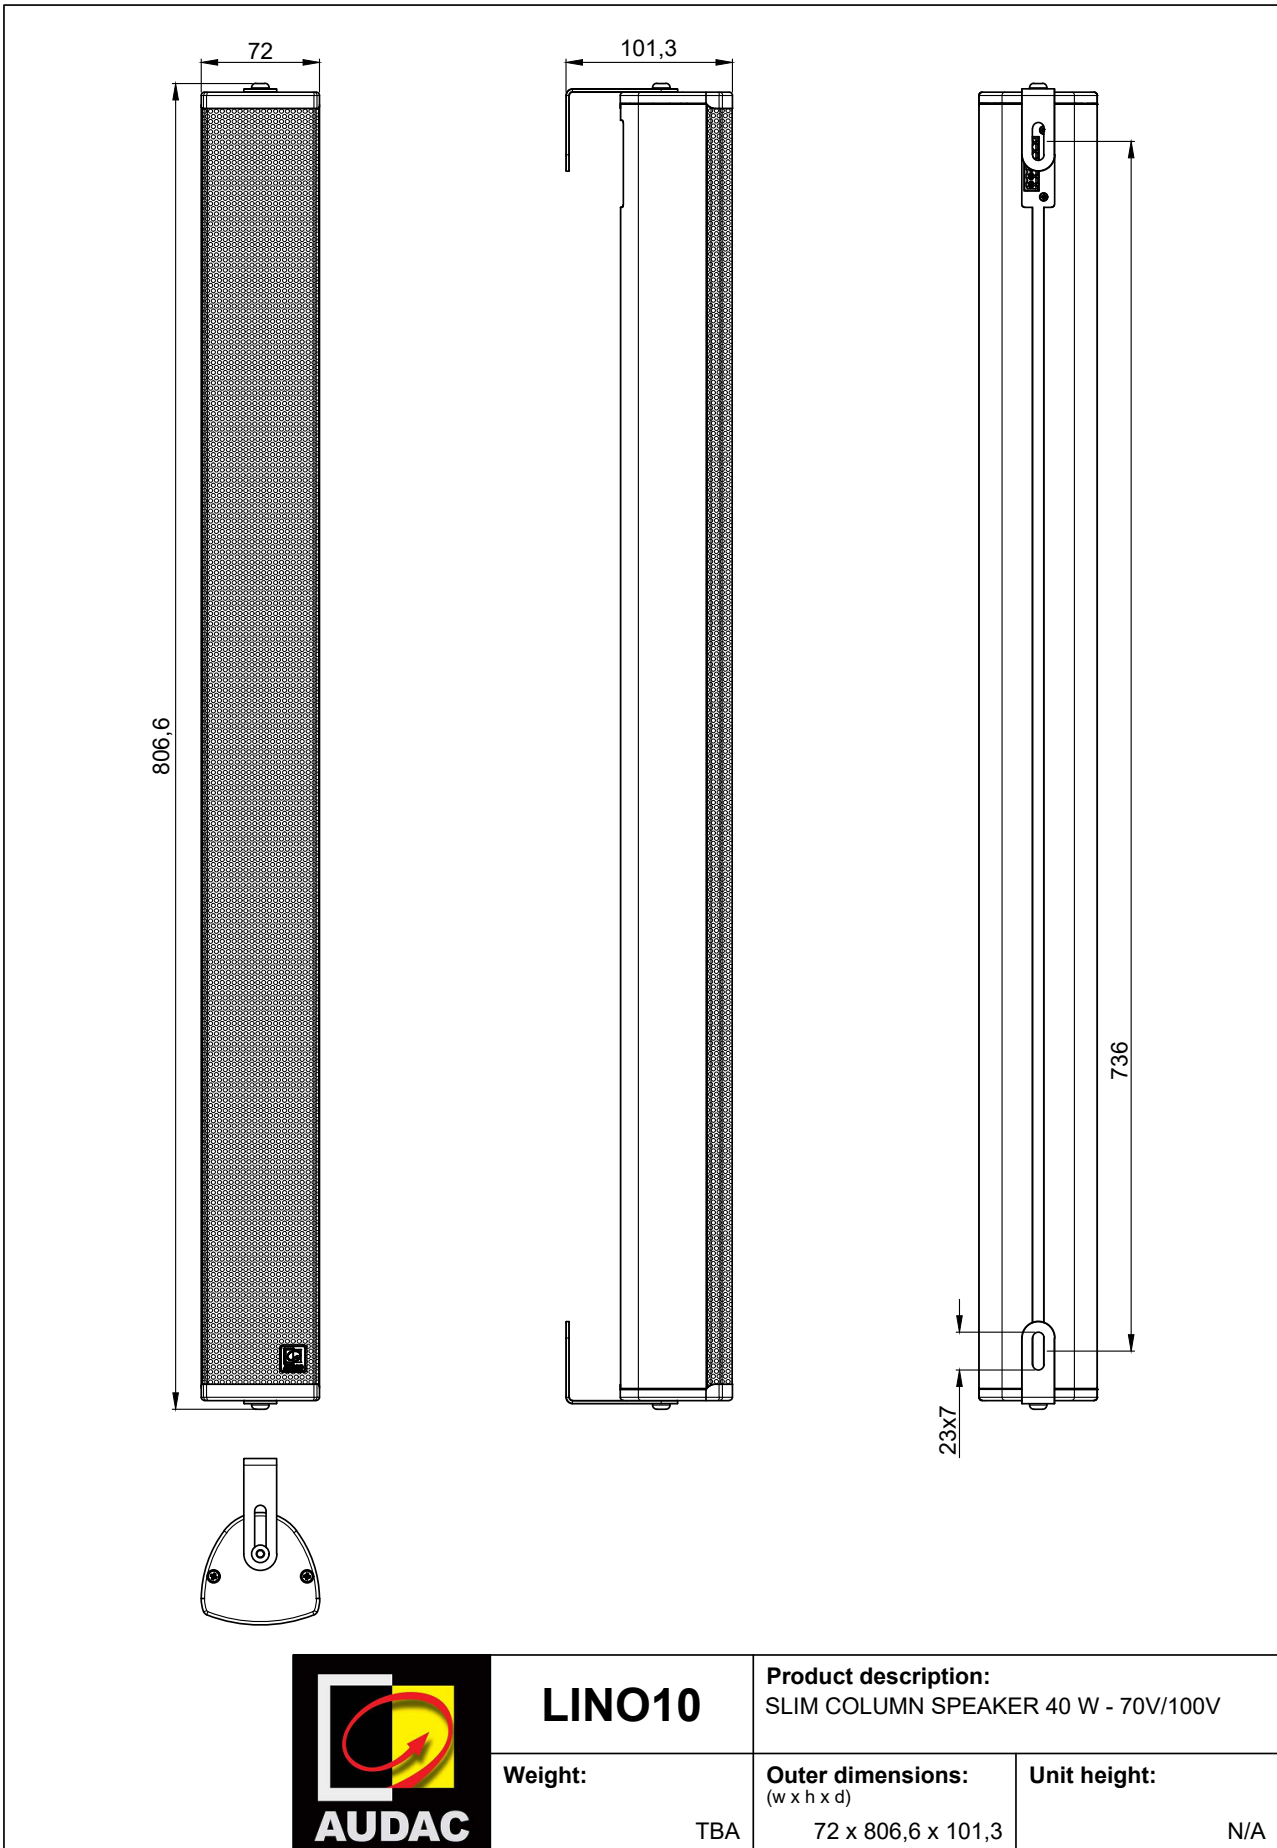

**LINO10**

**Product description:**  
SLIM COLUMN SPEAKER 40 W - 70V/100V

**Weight:**  
TBA

**Outer dimensions:**  
(w x h x d)  
72 x 806,6 x 101,3

**Unit height:**  
N/A